


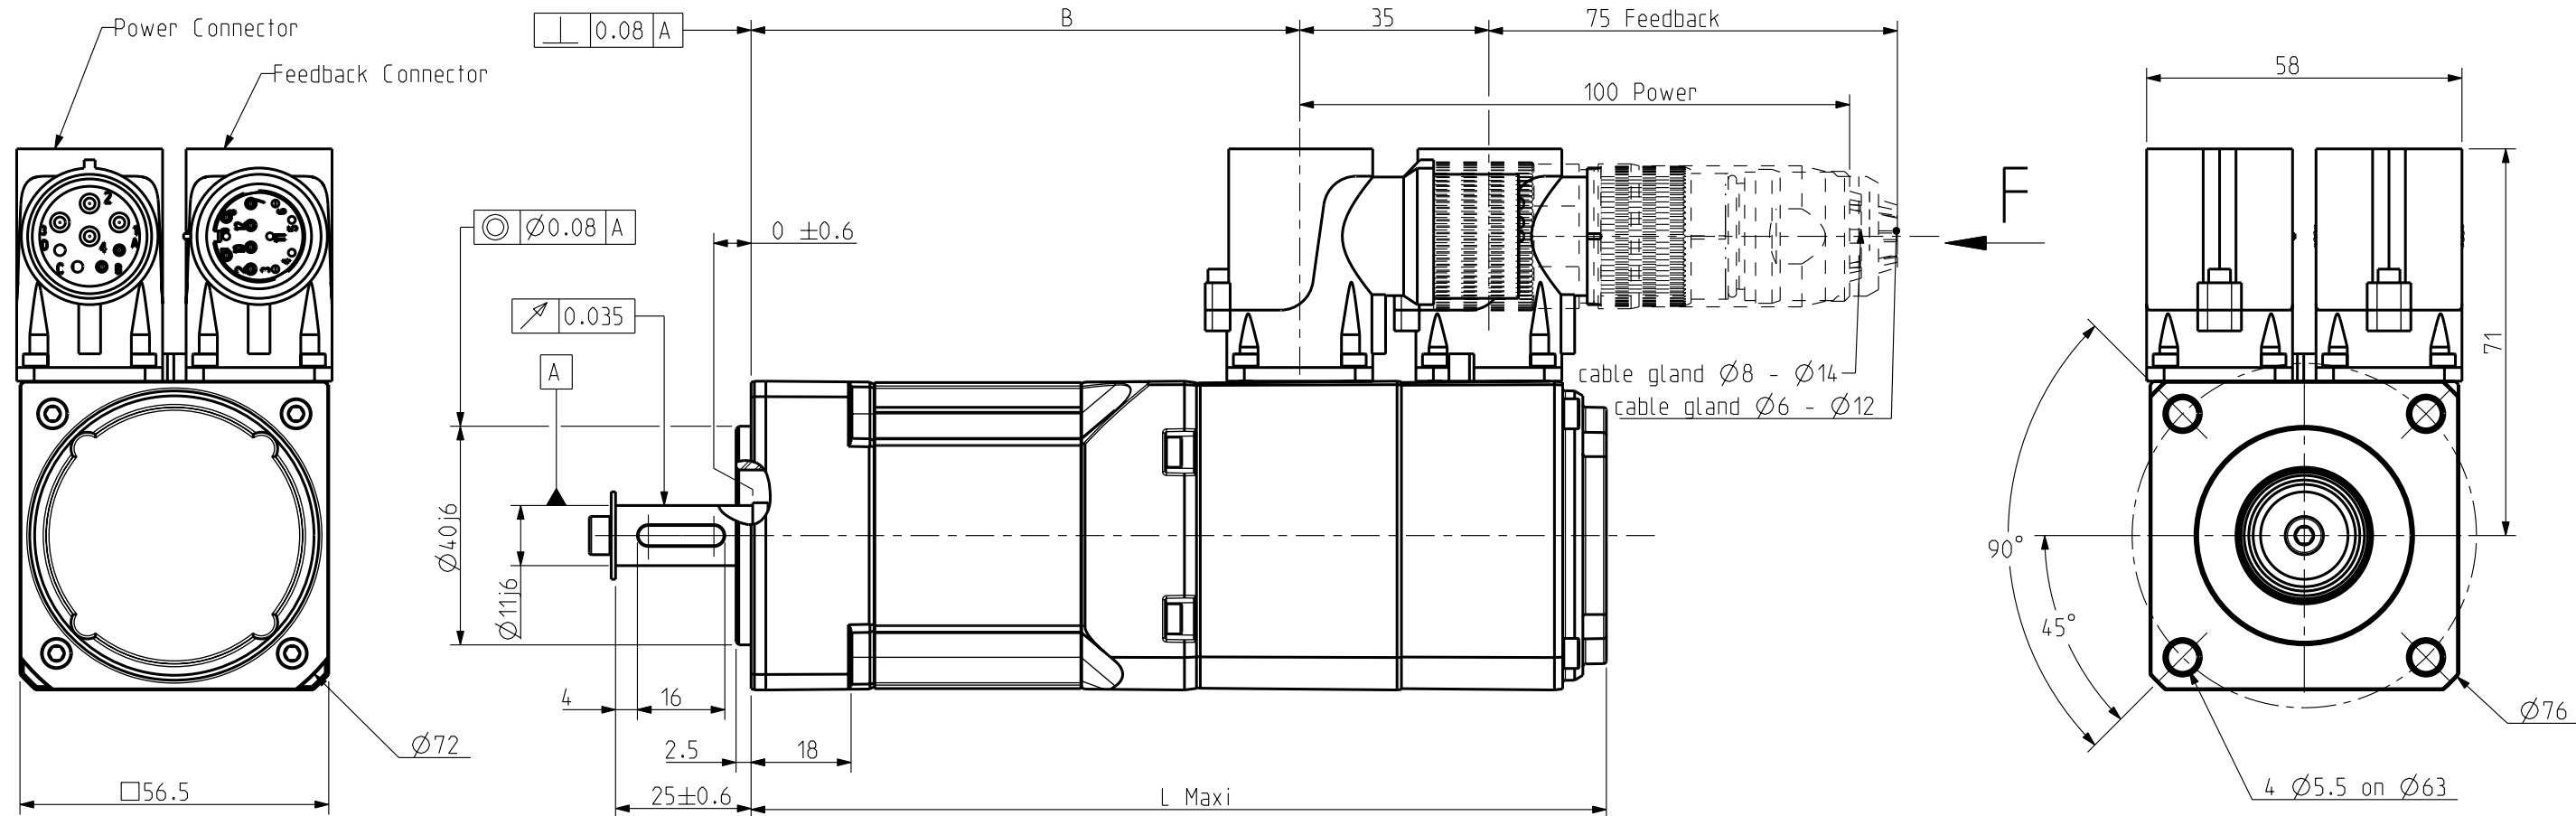

POWER CONNECTOR

1 : Phase U
 2 : Ground
 3 : Phase W
 4 : Phase V
 A : Brake +
 B : Brake -
 C, D : No connection



FEEDBACK CONNECTOR

S2, S4, S3, R2, R1, S1

BRAKE

Supply voltage : 24V $\pm 10\%$
 Static torque

100°	*
20°	1 Nm
temp	Torque

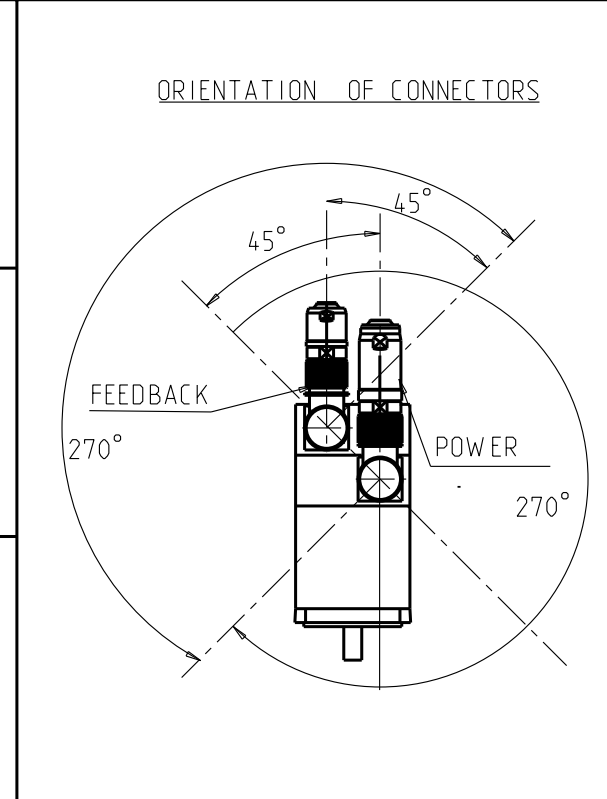

SHAFT END

M4 x 10, 12.5 ± 0.12 , 4h9

DIMENSIONS

	NX205	NX210
L Maxi	137	157
B	80	100

Drawing valid for :

Weight :

This document is the property of PARVEX. Transmission as well as reproduction or copy is not permitted without written authorisation.

Drawn	30/07/04	BB	Visa						
Modifications									
a	AM 21905 le 03/03/05 BB								

Scale: 4:5

SSD DRIVES
PARVEX
 8 Avenue du lac. BP249
 21007-DIJON cedex-FRANCE
 www.parvex.com

NX200

OUTLINE DRAWING

Format	F	E	S	G	I
A3	x	x			

344594AE7301 a